

Rittal – The System.

Faster – better – everywhere.

接线箱 KL 钢板，带压 盖板 – KL 1540.510

Date : 2022-11-9

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



接线箱 KL 钢板，带压盖板 – KL 1540.510

created: 09.11.2022 build on www.rittal.com/cn-zh

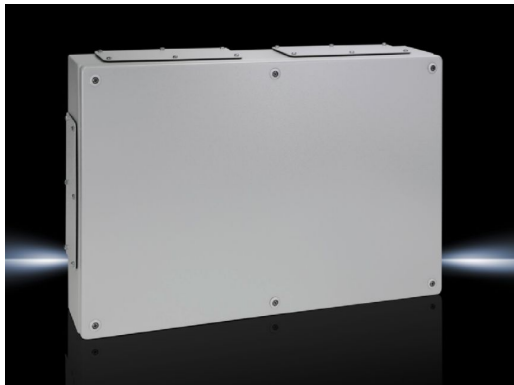

产品描述	
材料:	箱体：钢板 箱盖：钢板，周围用发泡聚氨酯塑料 (PU) 密封圈
表面:	箱体和箱盖：浸涂底漆，外经粉末涂层，织纹
颜色:	RAL 7035
防护等级 IP，符合 IEC 60 529 标准:	IP 55
防护等级 NEMA:	NEMA 12
IK 编码:	IK08
供货范围:	箱体配有箱盖 含塑料插口的快换螺纹接口 钢板封盖板带密封件和安装固定件
基本材料:	钢板
产品描述	
尺寸:	宽度: 600 mm 高度: 400 mm 深度: 120 mm
材料厚度:	箱体: 1.38 mm 箱盖: 1.25 mm
封盖板:	尺寸/数量 (上/下) : 2 / 2 + 2

尺寸/数量 (左/右) : 2 / 1 + 1

包装单元:	1 件
重量/包装:	9 kg
EAN:	4028177251618
税率号:	73269098
ETIM 7.0:	EC000261
ETIM 6.0:	EC000261
eCl@ss 8.0/8.1:	27180101
eCl@ss 6.0/6.1:	27180101
产品描述:	KL 接线箱 W600H400D120 RAL7035
认证	
认证:	Bureau Veritas DNV-GL Lloyds Register of Shipping UL + C-UL
证书:	IK-Code NA 防护等级
声明:	符合性声明