


TECHNICAL DATA SHEET

Rapid repair tape HR


Art. no. 0985 077 230

P. Qty.: 1

Highly resistant, self-bonding silicone tape for immediate repair and sealing of pipes and hoses up to 8 bar pressure (with dia. 1 inch), for covering tool handles.

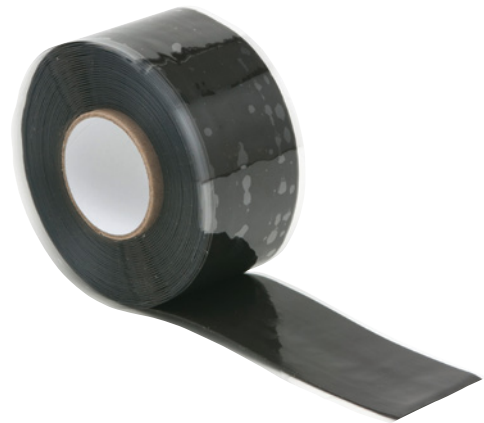

Backing material	Silicone
Colour	Black
Width	25 mm
Min./max. processing temperature	-50 to 260 °C
Elongation at break	300 %
Min./max. temperature resistance	-60 to 260 °C
Ultraviolet resistance	Yes
Moisture resistance	Yes
Length	3.65 m
Total thickness	0.5 mm
Dielectric strength	15000 V/mm
Product weight (per item)	69 g



Application area

- Repairs and seals pipework and hoses up to 8 bar pressure (with dia. 1 inch)
- Seals/repairs, e.g. heating pipes, cooling pipes, fittings, water pipes
- Seals/repair, e.g. radiator hoses, oil lines, garden hoses, pneumatic equipment
- Seals/repairs, e.g. construction machinery lines
- Covers tool handles
- Other applications include the boating sector, camping etc.

TECHNICAL DATA SHEET

Notice

The tape is not self-adhesive. Only intended for temporary repairs. Cannot be reused. It is not recommended to change the position after sealing.

The usage instructions are recommendations based on the tests we have conducted and our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee consistent quality of our products. We reserve the right to make technical changes and further develop products.