

TECHNICAL DATA SHEET



Hot melt adhesive 101

Art. no. 0890 100 050

P. Qty.: 1

Elastic hot melt adhesive for dent removal, and for securing components and coil wires in the electrical industry.

Chemical basis	Polyamide
Weight of content	200 g
Colour	Yellow
Length	200 mm
Diameter	12 mm
Density/conditions	1 g/cm ³ /at 20 °C
Viscosity	3500 mPas
Softening point	140 °C
Min./max. open time	20-60 s
Min./max. processing temperature	180 to 210 °C
Shelf life from production	18 Month
Silicone-free	Yes
Solvent-free	Yes
Number of pieces	10 PCS

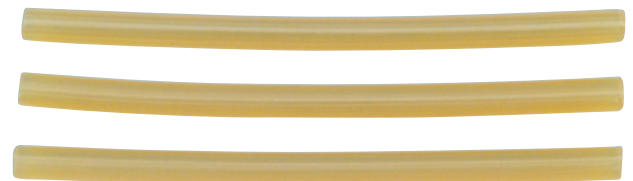

Application area

Ideal for the automotive industry for effective dent removal on different materials and surfaces by affixing pulling tabs. Also perfect for securing components and coil wires in the electrical industry.

Proof of Performance



TECHNICAL DATA SHEET

Notice

Polyamides in balance with air humidity. The moisture absorbed can cause foaming (vapour formation) when melting polyamides. We recommend resealing the packaging well after each removal, and if necessary to dry the hot melt adhesive for 48 hours at approx. 50°C prior to processing.

Heat occurring during storage (e.g. due to solar radiation) must be avoided due to the changes to the outer shape of the hot melt adhesive this can cause.

The usage instructions are recommendations based on the tests we have conducted and on our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting with deliberate intent. We guarantee the consistent quality of our products. We reserve the right to make technical changes and further develop products. Please observe the technical data sheet!